

CERTIFICATE




SPECIFICATION

System Name	MetaRoof-TR-Hook system
Roof Type	Tile roof
Tilt Angle	0° - 45°
Wind Load	60m/s
Snow Load	1.6KN/m ²
Applicable Solar Module	Framed/Frameless
Panel Layout	Portrait/Landscape
Design Standard	BS EN1991, ASCE7-10, BS 6399, AS-NZS 1170, GB 50009-2012, MS 1553
Material	AL-6005-T6 & SUS304
Color	Sliver/Black
Warranty	10-year

FEATURE

1. High suitability. A variety of roof hooks suit for pantile, plain tile, or slate tiles.
2. Meet varying load requirements. The comprehensive range of aluminum rails for varying load requirements.
3. Compliant with different standards. Compliant with European, American, Australian and other international standards.

INSTALLATION

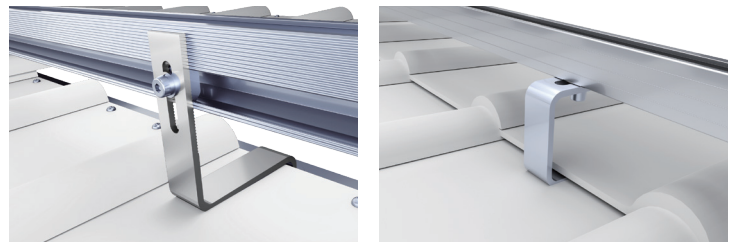

COMPONENT

- | | | |
|---|--|-------------------|
| 1 | | Rail 4700mm |
| 2 | | Rail 2300mm |
| 3 | | Rail splice |
| 4 | | End Clamp |
| 5 | | Mid Clamp |
| 6 | | Tile Hook |
| 7 | | Grounding Lug Kit |
| 8 | | Grounding Clip |
| 9 | | Cable Clip |

OPTION

- | | | |
|---------------------|----------------------------------|--------------------|
| | | |
| Tile hook portrait | Tile hook landscape | Tile hook portrait |
| | | |
| Tile hook landscape | Tile hook portrait | Tile hook portrait |
| | | |
| Tile hook portrait | Tile hook portrait and landscape | Tile hook |