



CERTIFICATE




SPECIFICATION

System Name	MetaRoof-FR- Ballast system
Ground Type	AL
Tilt Angle	10°
Wind Load	50m/s
Snow Load	1.0KN/m ²
Applicable Solar Module	Framed
Panel Layout	Landscape
Design Standard	BS EN, ASCE7-10, BS 6399, AS-NZS 1170, GB 50009-2012, MS 1553
Material	AL-6005-T6, SUS304
Color	Sliver/Black
Warranty	10-year

FEATURE

1. Non-penetrating solution. Non-penetrating roof ballast mounting ensure water-tightness.
2. Save installation time and labor cost. Simple and pre-assembled structure saves the on-site installation time and labor cost.
3. Customizd design. Ballast weight is customizable to different wind zone.

INSTALLATION

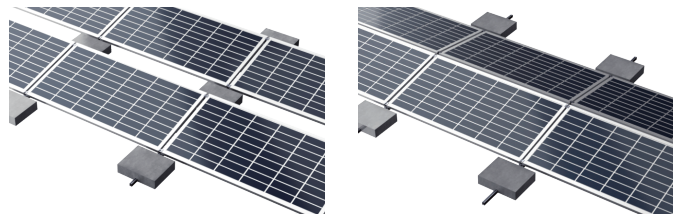

COMPONENT

- | | | | | | |
|----------|--|---------------|----------|--|-----------------|
| 1 | | End Clamp | 5 | | Splice for Rail |
| 2 | | Front Base | 6 | | Grounding Clip |
| 3 | | Back Base Kit | 7 | | Cable Clip |
| 4 | | Bottom Rail | | | |